

OZONE

KONA 3

Pilot Manual - EN



CONTENTS

Thank You	01
Warning	02
Your Kona 3	03
Risers	04
Limitations	07
Preparation	09
Basic Flight Techniques	11
Advanced Flying Techniques	16
Incidents	19
Caring and Maintenance	21
Ozone Quality	28
Technical Specifications	29
Drawing/Riser lengths	30
Line diagram	31
Materials	32

THANK YOU

Thank you for choosing Ozone.

As a team of paragliding and paramotoring enthusiasts, competitors and adventurers, Ozone's mission is to build equipment of the highest quality. We are constantly working together to develop cutting edge designs with class leading performance and maximum security. Wings are rigorously tested and developed by our team of experienced, discerning, world-class pilots to ensure they meet your expectations and demands. The products we offer you are the ones we fly ourselves, every day.

To ensure the highest levels of quality, we manufacture our products in our own production facility. This unique made-to-order system means that every glider is effectively tailor-made for you. Panels are individually laser cut from a single layer to ensure the highest precision and production consistency from one wing to the next. Your wing undergoes numerous rigorous quality control checks at each and every stage of the manufacturing process to guarantee it meets the highest industry standards.

It is essential that you read this manual before flying your wing for the first time. It includes important information regarding the use and care of your paraglider. For the latest updates, including all technical datas, please refer to the latest online version.

If you need any further information about any of our products please check flyozone.com or contact your local dealer, school or any of us here at Ozone.

Safe Flying!
Team Ozone

WARNING

- Paragliding/Paramotoring is a potentially dangerous sport that can cause serious injury including bodily harm, paralysis and death. Flying an Ozone paraglider is undertaken with the full knowledge of the involved risks.
- As the owner of an Ozone paraglider you take exclusive responsibility for all risks associated with its use. Inappropriate use and or abuse of your equipment will increase these risks.
- Any liability claims resulting from use of this product towards the manufacturer, distributor or dealers are excluded.
- Be prepared to practice as much as you can - especially ground handling, as this is a critical aspect of paragliding. Poor control while on the ground is one of the most common causes of accidents.
- Be ready to continue your learning by attending advanced courses to follow the evolution of our sport, as techniques and materials keep improving.
- Use only certified paragliders, harnesses with protector and reserve parachutes that are free from modification, and use them only within their certified weight ranges. Please remember that flying a glider outside its certified configuration may jeopardise any insurance (e.g. liability, life etc) you have. It is your responsibility as the pilot to verify your insurance cover.
- Make sure you complete a thorough daily and preflight inspection of all of your equipment. Never attempt flying with unsuitable or damaged equipment.
- Always wear a helmet, gloves and boots.
- All pilots should have the appropriate level of license for their respective country and third party insurance.
- Make sure that you are physically and mentally healthy before flying.
- Choose the correct wing, power unit and flying conditions for your level of experience.
- Pay special attention to the terrain you will be flying and the weather conditions before you launch. If you are unsure do not fly, and always add a large safety margin to all your decisions.
- **NEVER fly your glider in rain, snow, strong wind, clouds or turbulent weather conditions.**
- If you use good, safe judgment you will enjoy many years of paragliding/paramotoring.

YOUR KONA 3

The Kona 3 is the PPG version of the Buzz Z7, sharing the same technology, cutting edge performance, comfort and ease of use. It is the perfect cross over wing that excels whether flown under power or in free-flight.

The Kona 3 has the same improvements in profile and sail tension than the Buzz Z7, making it even cleaner than the predecessor. The result is better performance, especially accelerated which improves take off speeds and reduces fuel consumption. The Kona 3's aspect ratio remains the same as the Kona 2 - we focused on other areas, notably reducing drag and adjusting the trimming for a more fun, sporty feel.

Optimisation of the line materials and layout has led to a 20% reduction in overall line drag compared to the Kona 2. Line drag constitutes up to 1/3rd of the total drag generated by the wing, so this is a significant reduction and directly relates to improved sink rate for better launch and improved glide performance, especially in accelerated flight for better fuel consumption.

Although not a full on reflex profile, the Kona 3 features the well proven, solid Shark Nose profile that is very collapse resistant and forgiving in the brake range. The Kona 3 also features double 3D shaping for a cleaner leading edge; a new internal structure for comfort and structural strength along with an optimised line layout to reduce parasitic drag. The Kona 3 is a modern performance wing offering class leading performance, solidity and high levels of safety. Above all else, the Kona 3 is easy to fly with intuitive, fun, progressive and precise feel though the brakes. It is highly compact, with perfectly coordinated roll and yaw for sporty agile feel.

Launching is a critical part of each and every flight, and we have paid particular attention to the ground-handling characteristics of the Kona 3. It inflates smoothly, without overshooting in higher winds and in zero wind conditions there is no tendency to hang back.

All of these factors provide you with the confidence to progress and have fun, whether flying under power or in free-flight mode.

The Kona 3 is suitable for a wide range of pilots from talented beginners to the most experienced, it is ideal for those who fly between around 30-50 hours per year and enjoy free flying as much as powered flight. Owning dedicated wings for both disciplines is expensive, the Kona 3 offers the perfect balance in one package.

RISERS

The updated risers feature trimmers; stronger brake handle magnets; adjustable brake pulley height settings, TST controls and coloured A risers for easy identification.

Although the Kona 3 shares the same top speed as the Buzz Z7, as delivered the wing does not conform to the EN 926.2 standard due to the inclusion of the trimmers. Fully certified Buzz Z7 risers are available, if you require them please consult with your dealer.

Trimmers

The Kona 3 is supplied with a trim riser set for comfortable fast cruising whilst under power. The standard setting is with the trimmers pulled all the way down to the slowest position. The wing has been EN flight tested with the use of the foot operated speed system and the trimmers set in the slow position. Flying outside of the certified weight range or releasing the trimmers will change the behaviour of the wing and invalidates any EN flight certification. When delivered the trimmers are locked in the standard position. In order to be able to release the trimmers and access the full speed range of the wing, the trimmer locking maillons must be removed before flight

The standard trim setting is recommended for take off, landing, climbing under power, whilst thermalling or free flying, rapid descent manoeuvres and when the air is turbulent. Brake pressure is at its lightest and handling at its best, the wing is also in its optimum trim for the fastest recovery should an incident occur. To increase cruise speed you can use the accelerator system, release the trimmers, or do both. Using the speed system has exactly the same effect on the geometry of the risers as releasing the trimmers. Unlike some other PPG wings, it is safe and possible to fly with the trimmers in the standard (slow) position whilst using the full range of the foot operated speed system. With the trimmers fully released it is possible to use the brakes for directional control. However when flying faster - by accelerating further with the speed system - directional control should be maintained with the TST. Using the brakes at speeds faster than the trimmer-released position weakens the profile and can lead to a collapse.

Flying with the trimmers released changes the behaviour of the wing, turns are steeper with a greater loss of height and the side collapse recovery will be more dynamic. Always return the trimmers to the standard (slow) position in turbulent air or before performing rapid descent manoeuvres.

IMPORTANT

This wing has passed the criteria required by the DGAC and has been load tested to the EN 926.1 standard. In addition to our own extensive testing, all sizes have also been independently flight tested to the EN 926.2 standard with the trimmers set to the slow position. Releasing the trimmers, or flying outside of the EN certified weight range invalidates any EN flight certification.

IMPORTANT

In order to be able to use the trimmers and access the full speed range of the wing, the trimmer locking maillons must be removed before flight.

Accelerator System

The risers feature an accelerator system with ball bearing pulleys for easy, comfortable high speed cruising. Using the speed system has exactly the same effect as releasing the trimmers, either can be used in any combination to accelerate the wing. Be careful, fully accelerated with trimmers released is fast and should only be used in calm conditions and sufficient altitude.

Brake Lines

The brake line lengths have been set carefully during testing. We feel it is better to have slightly long brake lines and to fly with a wrap when necessary.

- Ensure both main brake lines are of equal length.
- If a brake handle has been removed, check that its line is still routed through the pulley when it is replaced.
- When the brake handles are released in flight, the brake lines should be slack. There must be a substantial “bow” in them to guarantee no deformation of the trailing edge.
- There must be a minimum of 10cm of free play before the brakes begin to deform the trailing edge. This prevents the trailing edge from being deformed when using the speed system.

Adjustable Brake Pulley Position

The height of the brake line pulley can be adjusted according to pilot preference and to suite the power unit's hang points height. The higher setting (as set by the factory) is for low hang point motors, whilst a middle or lower setting are for units with higher hang points or for pilots with particularly short arms. To adjust the pulley height, first remove the pulleys from the risers and re-attach them at the desired position. Undo the Velcro magnet attachments for the brake handles and re-attach them a few cms below the new pulley position.

If you alter the pulley position, you must also re-lengthen the brake lines accordingly. Measure the distance of the new pulley position from the factory setting and move the brake handle position by the same amount using the black mark on KRL1 as the reference.

IMPORTANT

In the unlikely event of a brake line snapping in flight, or a handle becoming detached, the glider can be flown by gently pulling the rear risers (C-risers) or the TST system for directional control.

IMPORTANT

If you adjust the brake pulley height, you MUST re lengthen the brake lines accordingly.

Tip Steering System

The Tip Steering System (TST) uses ergonomic handles for control of the wing during high speed accelerated flight. Located on the B risers, the handles are easily accessible and linked to the very tips of the wing, giving high levels of precision and comfort for high speed cruising or accurate low level carving. The TST allows for precise handling without the need to use the brakes, it is not necessary to use large control movements to effect a turn so be progressive and gentle at first until you are familiar with the handling characteristics. The attachment height of the TST handles can also be adjusted according to your comfort, flying style and motor unit.

With the trimmers fully released it is possible to use the brakes for directional control. However when flying faster - by accelerating further with the speed system - directional control should be maintained with the TST. Using the brakes at speeds faster than the trimmer-released position can lead to a collapse. Application of brake when the wing is at a low angle of attack has a negative effect on the reflex profile causing loss of precision, adverse roll, and reduced collapse resistance. In accelerated flight the tip steering system can be used for both directional control - to keep a straight heading and for effecting nice smooth turns. It becomes more precise the faster you fly.

When using the TST, it is advised to keep the brake handles through the wrists. This is in case of an engine failure or loss of control. It is therefore necessary to ensure that the brake lines are adjusted in such a way that they are not activated when using the tip steering - make sure the brake and TST lines are set correctly.

IMPORTANT
When accelerated at full speed, directional control should be maintained with the TST system. Do NOT use the brakes.

LIMITATIONS

Pilot Suitability

The Kona 3 has been designed as a solo beginner wing suitable for all levels of training. It is not intended for tandem flights nor aerobatic manoeuvres.

Certification

This wing has passed the criteria required by the DGAC and has been load tested to the EN 926.1 standard. In addition to our own extensive testing, it has also been independently flight tested to the EN 926.2 standard with the accelerator system, but with the trimmers set to the slow position only. Releasing the trimmers, or flying outside of the EN certified weight range invalidates any EN flight certification. As delivered, the wing does not conform to the EN 926.2 standard due to the inclusion of the trimmer risers.

Trike Flying

The Kona 3 may be used with a light solo trike so long as the maximum recommended weight range is respected. It is strongly recommended to not perform deeply engaged, high sink rate spirals when flying with a trike.

Towing

The Kona 3 may be tow-launched. It is the pilot's responsibility to use suitable harness attachments and release mechanisms and to ensure that they are correctly trained on the equipment and system employed. All tow pilots should be qualified to tow, use a qualified tow operator with proper, certified equipment, and make sure all towing regulations are observed.

Wing Loading and Flight Characteristics


Wing loading has a significant effect on the flight characteristics and behavior of the wing. Heavily loaded, the Kona 3 is more responsive to pilot inputs and reacts more dynamically in turns with a greater loss of height. Recovery from collapses will tend to be more impulsive with higher pitch angles. High loading also makes the wing more likely to remain neutral in a spiral dive, especially when combined with a high hang point or trike power unit. Flying at the maximum recommended load is only suitable for more experienced pilots who have the necessary skills to control a more dynamic wing. High G rapid descent manoeuvres should

IMPORTANT

The Kona 3 is certified EN B with the accelerator, but with the trimmers set to the slow position. Releasing the trimmers, or flying outside of the certified weight range invalidates EN certification.

IMPORTANT

It is strongly recommended to not perform deeply engaged, high sink rate spirals when flying with a trike.



be avoided when flying above the maximum recommended EN weight or when flying with a trike or high hang point harness. We advise you to aim for the middle of the recommended EN weight range for free flying and to never fly above Ozone's recommended PPG weight range whilst under power.

Flying in the Rain

Modern wings are susceptible to rain and moisture, flying with a wet wing can result in the loss of normal flight. Due to the efficient, wrinkle-free design of the sail, water tends to bead on the leading edge causing flow separation. Flow separation will make the wing more prone to entering inadvertent parachutal stalls, so flying in the rain, or with a wet wing (e.g. early morning dew) should be avoided at all costs. If you are accidentally caught-out in a rain shower, it is best to land immediately. If your wing becomes wet in the air it is advised to maintain accelerated flight using the speed bar and/or releasing the trimmers, even during the final approach. DO NOT use big ears as a descent technique, big ears increases drag, and with a wet wing this will further increase the chances of a parachutal stall occurring. Instead, lose height with gentle 360's and maintain your air speed at all times. If your wing enters parachutal stall when wet, immediately release the trimmers and accelerate the wing to regain airspeed.

Modifications

Your Ozone Kona 3 was designed and trimmed to give the optimum balance of performance, handling and safety. Any modification voids the certification and will also make the wing more difficult and dangerous to fly. For these reasons, we strongly recommend that you do not modify your glider in any way.

IMPORTANT

Do not perform high G spiral dives when flying with a trike, a high hang point harness or when flying above the maximum EN weight range.

IMPORTANT

Do not fly your wing when it is wet.

IMPORTANT

Do not modify your wing in any way.

PREPARATION

Accelerator System

To set up the accelerator on the ground, ask a friend to pull your risers into their in-flight position while you sit in your harness. Now adjust the length of the line so that the main bar sits just beneath your seat. You should now be able to hook your heel in to the secondary (lower) loop of the accelerator.

The accelerator must be slack enough to ensure that the front risers are not pulled down in normal flight, but not so long that it is impossible to use the full range of the speed system. Ensure that the speed bar is secured in place before take off to avoid fouling the prop. Once set up, test the full range of the speed system in calm flying conditions: ensure that both risers are pulled evenly during operation. Fine-tuning can be completed when you are back on the ground.

Harness and Motor

It will be in your harness that you will enjoy flying. Therefore, we recommend you spend the time on the ground to adjust your harness' different settings. Suspend from a solid beam to check you are comfortable and that you can reach the brake handles, tip steering handles and achieve the full range of the speed bar travel before flying. Do not fly with your chest strap set too tight.

The Kona 3 is suitable for all types of power units, however we recommend using units with low hang points or Goose neck systems. Using power units with high hang points is possible, but it will have a detrimental effect on the behaviour of the wing especially during spiral dives with an increased risk of neutrality. Using a harness that does not conform to the dimensions required of the EN standard or flying with a power unit will lead to a change in the flight characteristics.

There are many different motor units available and it is vitally important that you choose one that is suitable for your needs, weight and skill level. Due to the high performance profile of the Kona 3, a unit with a less powerful motor and low movable hang points may be advisable.

IMPORTANT

When accelerated directional control should be maintained with the TST system or the rear risers. Do NOT use the brakes, doing so will make the profile less stable.

IMPORTANT

The wing has been certified with defined harness dimensions. The 31, 29, 27, 26 were certified with hangpoint width between 44-48cm whilst the 24 and 22 were between 42 and 44cm.

Wing

To familiarise yourself with the glider it is a good idea to perform practice inflations and ground handling both with and without the motor. As with all new equipment, only fly in conditions that you would normally fly in and on a familiar site. Fly the wing in a progressive manner and be aware that wing loading has a direct effect on the wing's flying characteristics.

Preflight Checks

Lay out the wing downwind of your motor on its top surface in a pronounced arc, with the centre of the wing higher than the tips. As you unfold the wing check the upper and lower panels for any rips or tears, pay particular attention to the seams and line attachment points as these are load bearing. Never fly with a damaged wing.

Lay out the lines one side at a time and check for any obvious signs of damage. Hold the risers clear of the ground at shoulder height and starting with the brake lines, pull all lines clear. Repeat the process with the D, C, B and then the A lines, laying the checked lines on top of the previous set. Make sure no lines are tangled, knotted or snagged then mirror the process on the other side.

Take-off checklist:

1. Check reserve parachute - pin in and handle secure
2. Helmet on and fastened
3. All harness buckles closed - check leg-loops again
4. Carabiners and maillons tight
5. Holding the A's, your brake handles and throttle
6. Leading edge open
7. Aligned directly into wind
8. Engine warm and able to deliver full power
9. Trim set correctly
10. Prop clear of lines
11. Airspace and visibility clear

IMPORTANT

Never attempt to fly with a damaged sail or lines.

BASIC FLIGHT TECHNIQUES

Launching

Your Kona 3 will launch with either the forward or reverse launch techniques. It is recommended to launch with the trimmers set to the standard (slow) position, but you can increase the speed of the inflation by releasing the trimmers a few cm if you wish.

When taking off under power, make sure there is enough clear space upwind of you to launch and climb out safely, avoiding trees, power lines and any other obstacles that may affect you should you have a power failure. Always fly with a safety margin so that power failures do not leave you compromised. You should always be able to glide power off to a suitable landing place.


Once clipped in, and you have gone through the take-off check list (above), stand central to the wing to ensure an even and progressive inflation. Whilst inflating your wing, you should hold both of the A risers on each side.

Run in an upright position so that the motor is generating forward thrust, do not lean too far forward otherwise the power of the motor will attempt to push you into the ground! When you have enough airspeed a gentle application of brake will help you lift off. Do not stop running until your feet have left the ground and you are sure of a safe climb out.

Forward Launch - Nil to Light winds

When the wind is favourable, move forward positively: your lines should become tight within one or two steps. The Kona 3 will immediately start to inflate. You should maintain a constant pressure on the risers until the wing is overhead. Do not pull down or push the risers forward excessively, or the leading edge will deform and possibly collapse making taking-off more difficult and potentially dangerous.

Move smoothly throughout the entire launch, there is no need to rush or snatch at it. You should have plenty of time to look up and check your canopy before committing yourself. Once you are happy that the Kona 3 is inflated correctly, progressively apply full power and accelerate smoothly for the launch.

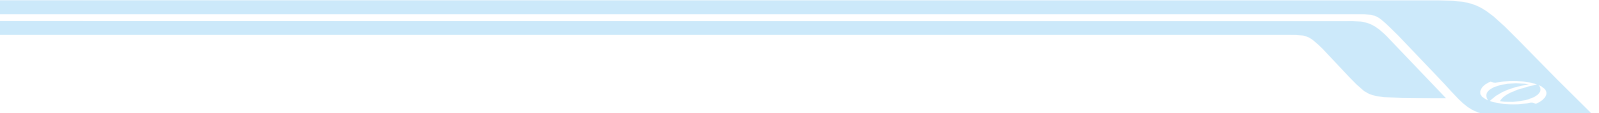

During a forward launch we advise to NOT use the power launch technique. During the inflation the power should be progressively applied once the wing is half way up. Applying the power too early may inhibit the inflation characteristics of the center part of the wing, causing the wing tips to come up faster.

Reverse Launch -Light to Strong Winds

Lay out your Kona 3 as you would for the forward launch. However, this time face the wing, and attach the risers in the correct manor (half a turn in each riser, and crossed in the direction you want to turn). Now you can pull up the Kona 3 by its A-risers. Once the wing is overhead, brake it gently, turn and launch.

In stronger winds, be prepared to take a few steps towards the glider as it inflates. This will take some of the energy out of the glider and it will be less likely to over-fly you. Once stable and above your head apply progressive power and accelerate smoothly for a controlled take off.

Practice ground handling and launching as much as possible! It is great fun, and will give you a much better feel for your Kona's flight characteristics. It will also improve your overall enjoyment of flying by making your launches easier and safer.

IMPORTANT
Never take off with a glider that is not fully inflated or if you are not in control of the pitch/roll of your wing.

The Climb Out

Once in the air you should continue flying into wind whilst gaining height. By setting the trimmers to the first white line position you will achieve the best climb rate. Do not attempt to climb too steeply or too quickly by using the brakes or slow trim. The wing already has a high angle of attitude, coupled with a higher AoA (if you use the brakes) plus the engine's full thrust acting on the pilot, this could contribute to make the glider more prone to stall. Furthermore, in the event of an engine failure the resulting backward pendulum motion of the pilot and the forward dive of the wing may bring you back to the ground very hard. Do not initiate turns until you have sufficient height and airspeed. Avoid low turns downwind with insufficient airspeed.

The Kona 3 is well damped in roll but under certain circumstances it is possible for the pilot to induce oscillations. This is caused by a combination of the engine/propeller torque and pilot weight shift and/or brake inputs. To stop oscillations it is best to reduce the power slightly and ensure that you remain static with weight shift and brake inputs. Once settled you can once again apply full power. Under full power the torque effect will attempt to gently turn the wing, using weight shift or adjusting the trims asymmetrically is the best method to correct this.

Normal Flight

Once at a safe height you can release the trimmers for a faster cruise speed. If your motor has enough power, the Kona 3 will achieve very good straight line speeds whilst maintaining level flight with trims fully released and full speed bar applied. Be cautious when releasing the trimmers, only do so in calm conditions.

Flying at trim speed (hands-up, trimmers pulled to the slow position), the Kona 3 will achieve its 'best glide' speed for still air. You should fly at this speed when gliding downwind or when the air is not excessively sinking. For better penetration in headwinds and improved glide performance in sinking air, crosswinds or headwinds, you should fly faster than trim speed by using the accelerator system or trimmers. Using up to half bar does not degrade the glide angle or stability significantly and will improve your flying performance. At full speed the Kona 3 is stable; however we recommend that you do not fly at full speed close to the ground or in turbulent air.

IMPORTANT
Never apply the brakes whilst using the speed system - it makes the wing more prone to collapse.

In turbulent air the profile is stable, it will resist reasonable levels of turbulence with a high resistance to collapse without pilot input. However in turbulent air Ozone recommends to return the trimmers to the neutral position (pulled down) and flying the glider actively. This way, you will be in the best position to react correctly should an incident occur.

By pulling the trimmers to the slow position and applying a small amount of brake, the Kona 3 will achieve its best minimum-sink rate; this is the speed to use for thermalling and ridge soaring whilst free flying. For maximum efficiency whilst flying downwind, release the speed bar and return the trimmers to the slow position.

Turning

To familiarize yourself with the Kona 3 your first turns should be gradual and progressive. To make efficient and coordinated turns first look in the direction you want to turn and check the airspace is clear. Your first input for directional change should be weight-shift, followed by the smooth application of the brake until the desired bank angle is achieved. To regulate the speed and radius of the turn, coordinate your weight shift and use the outer brake.

Active Flying

To minimize the likelihood of suffering collapses in turbulent conditions, it is essential to use active flying. These are skills that are best learnt by playing with the glider on the ground. Flying with a small amount of brake applied (approx. 20cm) will allow you to feel the feedback from the wing. In turbulent conditions the internal pressure of the wing is constantly changing and only by using a small amount of brake will you feel these changes. The aim of active flying is to maintain a constant pressure through the brakes, If you feel a reduction or loss of pressure apply the brakes until you feel normal pressure again. Once you have normal pressure, raise the hands quickly back to the original position. Avoid flying with continuous amounts of deep brake in rough air as you could inadvertently stall the wing. Always consider your airspeed. These movements can be symmetric or asymmetric; you may have to apply both brakes or just one. These subtle adjustments will keep the glider flying smoothly and directly above you and dramatically reduce the chances of a collapse. If the glider pitches in front of you, use the brakes to slow it down. Equally, if the glider drops behind you, release the brakes to allow it to speed up. The goal is to always keep the wing directly overhead.

IMPORTANT

Never initiate a turn at minimum speed (i.e. with full brakes on) as you could risk entering a spin.

IMPORTANT

Whilst free flying or whilst flying under power in thermic / turbulent air pull the trimmers to the slow (neutral) position and fly the wing actively.

No pilot and no glider are immune to collapses however active flying will virtually eliminate any tendency to collapse. When the conditions are turbulent, always return the trimmers to the slow position and be active and ready to anticipate the movements of your wing. Always be aware of your altitude and do not over-react. We strongly advise you to always keep hold of your brakes and to not fly in turbulent conditions.

IMPORTANT
Always keep hold of your brakes. Do not fly in turbulent conditions

Landing

The Kona 3 shows no unusual landing characteristics. We recommend the trimmers be returned to the normal slow position for landings. You can land un-powered or powered, here are some tips:

- Always set up your landing early, give yourself plenty of options and a safe margin for error and make sure you are heading INTO wind.
- Once below 30 metres avoid turning tightly as the glider will have to dive to accelerate back to normal flight.
- Allow the glider to fly with speed for your final descent until you are around 1 metre above the ground. Apply the brakes slowly and progressively to slow the glider down until the glider stalls and you are able to step onto the ground.
- It is safest to perform un-powered landings as this reduces the likelihood of propeller damage caused by either falling over or allowing the lines to foul the prop. Turn off the engine at around 30m and glide in like a normal paraglider.
- Powered landings offer the chance to power up and continue with the flight if you misjudge your final approach, but can be more expensive if you get it wrong!
- Choose the appropriate approach style in function of the landing area and the conditions.
- In light winds you need a strong, long and progressive flare to bleed off all your excess ground speed. In strong winds your forward speed is already low so you are flaring only to soften the landing. A strong flare may result in the glider climbing upwards and backwards quickly, leaving you in a vulnerable position.
- In strong winds you need to turn towards the glider the second your feet touch the ground. Once facing the wing pull smoothly and symmetrically down on the brakes to stall the wing. If the glider pulls you, run toward it.
- If the wind is very strong, and you feel you might be dragged, stall the glider with the C risers. This stalls the Kona 3 in a very quick and controllable way and will drag you less than if you use the brakes.

ADVANCED FLIGHT TECHNIQUES

Ozone would like to remind you that the following manoeuvres should be learnt under the supervision of a qualified instructor and always practiced with caution. Never forget that properly analysing the conditions before launch will help avoid the need to use these techniques.

Big Ears

Folding in the wing tips of the Kona 3 increases its sink rate. This is useful for staying out of cloud or descending quickly. To pull big ears on the Kona 3 take hold of the outermost A-line (Baby A) on each side whilst keeping the brake handles in your hand. Pull down the baby A risers until the tips of the wing fold under.

Do not use the brakes other than for re-inflation. For directional control while using the Big Ears, you should use weight shift steering. To reopen your big ears, release both baby As at the same time. To help re-inflation, brake gently one side at a time until tips regain pressure. Avoid deep symmetric applications of the brake as this could induce parachutal or full stalls.

Big ears and accelerator

Once the big ears are in you can further increase the sink rate by pushing on the accelerator bar. Never attempt to induce Big Ears with the speed bar already engaged, always make the Big ears before accelerating the wing otherwise you risk provoking a major asymmetric or symmetric deflation.

Big ears and spiral dive

Whilst it is possible to enter a spiral dive whilst holding in Big Ears, the high forces applied could exceed the breaking strain of the lines leading to equipment failure! Ozone strongly recommends to not do this.

B-Line Stall

B-stall is for fast descents in emergency situations only. B-stall is performed by symmetrically pulling down on the B-risers. The load applied on the B lines during this manoeuvre is not very good for your wing; only use it in emergency situations.

NEVER induce Big Ears in accelerated flight, this can lead to a major deflation. Always pull the Big Ears first and then apply the speed bar or release the trimmers.

DO NOT perform spiral dives with Big Ears engaged.

To initiate the B-stall trim the wing to the slow standard position and take hold of the maillons on the B risers. Do not release the brake handles. As you pull the B-lines down the airflow over the wing is broken and the glider loses its forward speed but remains open and you will descend at around 6 m/s. If you pull too much B-line the glider may horseshoe and move around a lot.

To exit the B-stall the B-risers should be released symmetrically and in one smooth, fast progressive motion. The glider will resume normal forward flight without further input. Check you have forward flight again before using the brakes. Do not release the B lines slowly, this may lead to a parachutal stall.

Spiral Dives

If you turn your Kona 3 in a series of tightening 360's it will enter a spiral dive. This will result in rapid height loss. Only ever perform spiral dives with the trimmers to the slow position, spirals with the trimmers released increases the chances of neutrality.

To initiate a spiral dive, look and lean in to the direction you want to turn and then smoothly apply the inside brake. The Kona 3 will first turn almost 360 degrees before it drops into the spiral (depending on the input). Once in the spiral you should apply a little outside brake to keep the outer wing tip pressured and inflated.

Safe descent rates are possible but high speeds and high G-forces can build quickly leading to disorientation and possible loss of consciousness. High descent rates, especially when combined with high wing loadings and high hangpoint power units increases the likelihood of the wing remaining neutral or possibly unstable in spiral. Never perform deep engaged spirals when flying with trikes, high hang point power units or when flying above the maximum EN weight.

To exit the spiral dive, weight shift away from the direction of rotation and smoothly release the inside brake. As the Kona 3 decelerates allow it to continue to turn until enough energy is lost for it to return to level flight without an excessive climb and surge.

IMPORTANT
Only perform spiral dives with the trimmers set to the slow position.

IMPORTANT
Always be prepared to pilot the wing out of a spiral dive. Use opposite weight shift and apply enough outside brake to stop the wing from spiralling.

Always be prepared to pilot the wing out of a spiral dive. In case of neutrality/instability use opposite weight shift and smoothly apply enough outside brake to provoke the glider to exit the spiral.

Active C Riser Control

It is possible to pilot the wing with the C risers for improved feel and control, enabling you to fly actively without using the brakes. Using brakes whilst accelerated causes drag which is not only inefficient but it also reduces the inherent stability of the profile - using the brakes whilst fully accelerated may lead to a collapse. Using the C risers increases the angle of attack more evenly across the chord and does not weaken the profile as much as using the brakes. The direct feel allows you to stop collapses before they happen and maintain higher speeds and higher levels of efficiency through turbulence.

To fly with the C risers, keep hold of your brake handles (remove any wraps) and take hold of the C risers. With the C risers you can fly actively through turbulence; If you see or feel the leading edge lose pressure, at the same time as releasing some or all of the accelerator you can also apply pressure to the C's, this will help keep the nose open. Be careful to use only small inputs with the C risers, you risk stalling part or all of the wing if you are over enthusiastic. The amount of pressure and size of the input is dependent on the amount of turbulence/loss of pressure, but always be gentle at first. Learn the feel of the wing - how much speed bar to release and the force required on the C's to keep the nose open without inducing unnecessarily large pitch movements. If you feel the nose of the wing start to collapse or pitch forward whilst in accelerated flight the first action should be to release the speed bar impulsively and then make any necessary C riser input. Using the combined active speed bar/C riser control technique you will be able to maximise your speed and efficiency whilst minimising the likelihood of collapses.

Be prepared for plenty of practice as this new method may take some time for it to become totally intuitive, efficient and comfortable. This control method is suitable for gliding in good 'normal' air, it does not replace proper active flying with the brakes in strong turbulent conditions. If you are unsure about the air return the glider to trim speed, release the C risers and fly the glider actively with the brakes.

IMPORTANT

Do not perform high G spiral dives when flying with a high hang point harness or when flying above the maximum EN weight range.

INCIDENTS IN FLIGHT

Deflations

Due to the flexible form of a paraglider, turbulence may cause a portion of the wing suddenly to collapse. This can be anything from a small 30% (asymmetric) collapse to a complete (symmetric) collapse.

If you have a collapse, the first thing to do is to control your direction. You should fly away from the ground or obstacles and other pilots, or at least not to fly into them. Asymmetric collapses can be controlled by weight shifting away from the collapse and applying a small amount of brake to control your direction. This act will most of the time be enough for a full recovery of the wing.

Once a glider is deflated it is effectively a smaller wing, so the wing loading and stall speed are higher. This means the glider will spin or stall with less brake input than normal. In your efforts to stop the glider turning towards the collapsed side of the wing you must be very careful not to stall the side of the wing that is still flying. If you are unable to stop the glider turning without exceeding the stall point then allow the glider to turn whilst you reinflate the collapse.

If you have a deflation which does not spontaneously reinflate, return the trimmers to the slow position and make a long smooth progressive pumps on the deflated side until it reinflates. This pumping action should take about 2 seconds per pump. Pumping too short and fast will not reinflate the wing and pumping too slow might take the glider close to, or beyond, the point of stall.

Symmetrical collapses normally reinflate without pilot input, however a short fast application of 15 to 20cm of both brakes at the moment of collapse will speed up the process and minimise height loss. Be careful to not over brake the wing and inadvertently cause a stall.

If your wing collapses during accelerated flight, immediately release the accelerator, maintain directional control whilst pulling the trimmers to the slow position before attempting to reinflate the canopy.

Cravats

If the tip of your wing gets stuck in the lines, this is called a 'cravat'. This can make your glider go into a spiral, which is difficult to control. The first solution to get out of this situation is to stabilise the glider into normal flight, i.e get control of your direction and then pull down the stabilo line (attached to the C riser) until the wing tip frees itself. You must be careful with any brake inputs or you may stall the opposite wing. You can also use strong deep pumps on the brake to the cravated side, when doing so it is important to lean away from the cravat otherwise you risk spinning or deepening the spiral. The aim is to empty the air out of the wing tip, but without spinning. Correctly done, this action will clear the cravat.

If it is a very large cravat and the above options have not worked then a full stall is another option. This should not be attempted unless you have been taught how to do it and can only be done with a large amount of altitude. Remember if the rotation is accelerating and you are unable to control it, you should throw your reserve parachute whilst you still have enough altitude.

Deep Stall / Parachutal stall

It is possible for gliders to enter a state of parachutal stall. This can be caused by several situations including; a very slow release from a B-line stall; flying the glider when wet; or after a front/symmetric deflation. The glider often looks as though it has recovered properly but carries on descending vertically without full forward motion. This situation is called 'deep stall' or 'parachutal stall'. Should it happen, your first reaction should be to fully raise both brakes, this action alone normally allows the glider to return to normal flight. If nothing happens after a few seconds, apply the speed bar or release the trimmers to regain normal flight. Ensure the glider has returned to normal flight (check your airspeed) before using the brakes again.

Never fly in rain or with a wet wing, this will significantly increase the likelihood of parachutal stall. If you are accidentally caught-out in a rain shower, land immediately. DO NOT use big ears as a descent technique; big ears with a wet wing will further increase the chances of a parachutal stall occurring. Instead, lose height with gentle 360's and make sure to consider your air speed during final approach, use a small amount of speed bar if necessary.

IMPORTANT

A bad preparation on launch, aerobatic flying, flying a wing of too high a level or in conditions too strong for your ability, are the main causes of cravats.

IMPORTANT

Only a few cms of input from your brakes can maintain your wing in the stall. Always release your wraps if you have taken them.

IMPORTANT

Never fly in the rain or with a wet glider

CARE AND MAINTENANCE

Packing

To prolong the life of your wing and to keep the plastic reinforcements in the best possible condition it is very important to pack the wing carefully.

Ozone recommends to use the concertina packing method exactly as shown so that all of the cells rest alongside each other and the plastic reinforcements are not unnecessarily bent. Using an Ozone Saucisse or Saucisse light pack will help preserve the life of the wing and aid with the speed and ease of packing.

Step 1. Lay mushroomed wing on the ground. It is best to start from the mushroomed position as this reduces the dragging of the leading edge across the ground.



Step 2. Group LE reinforcements with the A tabs aligned, make sure the plastic reinforcements lay side by side.



Step 3. Lay wing on its side and Strap LE...Note the glider is NOT folded in half; it is folded with a complete concertina from tip to tip. It is really important to not stress the middle cell or bend the plastic too tightly.



Step 4. Group together the middle/trailing edge of the wing by sorting the folds near the B, C and D tabs.

If using a Saucisse pack go to Step 8.



Step 5. Once the LE and rear of the wing have been sorted, turn the whole wing on its side.



Step 6. Fold the wing with 3 or 4 folds whilst being careful not to crush the LE.



Step 7. Now place the folded wing into the stuff sack.



Step 8. If using the Saucisse Pack, carefully zip it up without trapping any material.



Step 9. Turn the Saucisse on its side and make the first fold just after the LE reinforcements. Do not fold the plastic reinforcements, use 3 or 4 folds around the LE.



IMPORTANT: Do NOT lay the wing flat on the ground before packing the glider, this will cause abrasion damage to the top surface as you pull the glider towards the middle. ALWAYS pack from a mushroom or lift the wing off the ground when gathering the wing and grouping the leading edge.



IMPORTANT: Do not fold the glider in the centre, you will bend the plastics, instead pack the wing with a full concertina method from tip to tip before packing into the stuff sac.



Caring Tips

Careless ground handling damages many paragliders. Here are some things to avoid in order to prolong the life of your aircraft:

- DO NOT drag your wing along the ground to another take-off position - this damages the sailcloth. Lift it up and carry it.
- DO NOT try to open your wing in strong winds without untangling the lines first - this puts unnecessary strain on the lines.
- DO NOT walk on the wing or lines.
- DO NOT repeatedly inflate the glider and then allow it to crash back down. Try to keep this movement as smooth as possible by moving towards the glider as it comes down.
- DO NOT slam your glider down on the ground leading edge first! This impact puts great strain on the wing and stitching and can even explode cells.
- FLYING in salty air, in areas with abrasive surfaces (sand, rocks etc.) and ground handling in strong winds will accelerate the aging process.
- DO NOT fly in the rain or expose the wing to moisture.
- DO NOT expose the wing to unnecessary UV. Pack away once you have finished flying. Do not leave it sitting in the sun.
- If you fly with a wrap, you should regularly undo the twisting that appears on the main brake lines. By twisting the line become shorter and you can end up with a constant tension on the trailing edge which can lead to problem on launch, stalling, glider not flying symmetrically.
- Change your main brake lines if they are damaged.
- Be Careful when groundhandling to not saw the brake lines against the risers or main lines. The abrasion caused by a sawing motion can damage the main lines and lead to premature ageing of the risers. If you notice any signs of abrasion, especially to the lines, make sure you get the wing professionally serviced and importantly modify your groundhandling technique to stop any further damage.
- Your Ozone wing has an opening closed using Velcro on the trailing edge of the tip called the 'Butt hole'. This has been designed to easily empty all the things which have been accumulating in your wing (sand, leaves, rocks, mobile phones etc).
-

Storage and Transport

Always store all your flying equipment in a dry room, protected from direct heat. Your wing should be dry before being packed away. Moisture, heat and humidity are the worst elements for damaging your glider. Storing a damp glider in your car under the sun would be terrible for example.

If you land in salt water, you must first rinse it thoroughly with clean fresh water. Dry the wing completely, preferably out of the sun, in the wind. Never use a hair dryer, etc.

Take care that no insects get packed away with the wing. They may eat the cloth and make holes in a bid to escape. They can also leave acidic deposits if they die and decompose.

Transport the wing in the supplied bags and keep away from oils, paints, chemicals, detergents etc.

Cleaning

Any kind of wiping/scratching can damage the coating of the cloth. We recommend to not clean the wing, but if you do have to, use a soft cloth dampened with a small amount of water and use gentle movements little by little across the surface.

Wing Repairs

Always let a registered dealer, professional repair centre or the manufacturer carry out any major or complex repairs, especially those near seam margins.

If you damage the sail:

If the rip is small and in the middle of a panel however you can fix it yourself. You'll find all the materials in the repair kit you need. The fabric can be simply mended with the sticky rip stop/spinnaker tape. When cutting out the patches allow ample overlap of the tear and make sure both sides are different sizes. Make sure to round off each corner of the patches.

You can find more information about repairing your wing on the Ozone website, including step by step instructions with pictures.

IMPORTANT

Never pack away or store your glider wet.

IMPORTANT

Store your wing in a cool place away from excessive heat or moisture.

IMPORTANT

Never use detergent or chemical cleaners.

If you damage a line:

Any line that is visually damaged MUST be replaced. Use a reputable paragliding service centre to make the replacement lines. Alternatively you can order them from your local Ozone dealer or directly from our website <http://www.flyozone.com/paragliders/en/shop/lines.php>

It is important that replacement lines are made from the correct materials and diameters. You should check lengths against their counterpart on the other side of the wing to make ensure symmetry. Once the line has been replaced, inflate and check the glider before flying.

Maintenance Checks

Your wing, like a car, should be technically checked to ensure proper airworthiness. Your wing should be checked by a qualified professional for the first time after 24 months, or after 100 hours. However, if you are a frequent flyer (more than 100 hrs per year), then we recommend, that you get your glider checked annually. The checker should inform you about the condition of your glider and if some parts will need to be checked or changed before the next normal service check period.

The sail and the lines do not age in the same way or at the same rate; it is possible that you may have to change part or all of the lines during the wing's life. For this reason it is important to do regular inspections so that you know the exact condition of all of the components of your glider. We recommend that inspections are carried out by a qualified professional.

You alone are responsible for your flying kit and your safety depends on it. Take care of your equipment and have it regularly inspected. Changes in inflation/groundhandling/flying behaviour indicates the gliders aging, if you notice any changes you should have the wing checked before flying again. These are the basic elements of the check up (full details and permissible figures can be found on our website)

IMPORTANT
Take care of your glider and make sure you have it checked and serviced according to the schedule.

Porosity - A porosity meter measures the time taken by a certain volume of air to go through a certain surface of cloth. Measurements are made in several places along the top surface of the leading edge.

The tearing resistance of the cloth - A non-destructive test following the TS-108 standard which specifies minimum tear strength for sky diving canopies should be made using a Bettsometer. (B.M.A.A. Approved Patent No. GB 2270768 Clive Betts Sails)

Strength of the lines - An upper, middle and lower A line, along with a lower B line should be tested for strength.

Lengths of the lines - The overall length (riser lines + mid lines + upper lines) has to be checked under 5Kgs of tension. The difference between the measured length and the original length should not exceed +/- 10mm.

Compliance of the test sample's suspension lines, brake lines and risers were checked by the testing laboratory after the test flights were completed.

Risers - Visual inspection for signs of wear or abrasion. Differences to manual lengths should not exceed +/-5mm.

Canopy check - A full visual check should be carried out: All the components of the wing (stitching, ribs, diagonals, lines, tabs etc) should be checked for signs of deterioration.

OZONE QUALITY GUARANTEE

At Ozone we take the quality of our products very seriously, all our gliders are made to the highest standards in our own manufacturing facility. Every glider manufactured goes through a stringent series of quality control procedures and all the components used to build your glider are traceable. We always welcome customer feedback and are committed to customer service. Ozone guarantees all of its products against manufacturer's defects or faults. Ozone will repair or replace any defective product free of charge. Ozone and its distributors provide the highest quality service and repair, any damage to products due to wear and tear will be repaired at a reasonable charge.

If you are unable to contact your dealer then you can contact us directly at info@flyozone.com

Summary

Safety is paramount in our sport. To be safe, we must be trained, practised and alert to the dangers around us. To achieve this we must fly as regularly as we can, ground handle as much as possible and take a continuous interest in the weather. If you are lacking in any of these areas you will be exposing yourself to more danger than is necessary.

Respect the environment and look after your flying sites.

If you need to dispose the wing, do so in an environmentally responsible manner. Do not dispose of it with the normal household waste.

Finally, RESPECT the weather, it has more power than you can ever imagine. Understand what conditions are right for your level of flying and stay within that window.



Happy flying & enjoy your Kona 3.
Team Ozone

TECHNICAL SPECIFICATIONS

	22	24	26	27	29	31
No. of Cells	48	48	48	48	48	48
Projected Area (m ²)	18.6	20.3	21.6	23	24.4	26.3
Flat Area (m ²)	22.1	24.1	25.7	27.3	29	31.2
Projected Span (m)	8.21	8.58	8.85	9.12	9.4	9.76
Flat Span (m)	10.67	11.14	11.5	11.85	12.21	12.68
Projected Aspect Ratio	3.62	3.62	3.62	3.62	3.62	3.62
Flat Aspect Ratio	5.15	5.15	5.15	5.15	5.15	5.15
Root Chord (m)	2.61	2.73	2.82	2.91	2.99	3.11
Glider Weight (Kg)	4.81	5.07	5.33	5.56	5.93	6.22
Max Control Travel (cm)	60	66	69	78	78	82
EN certified Weight Range (Kg)	55-70	65-85	75-95	85-105	95-115	110-130
DGAC Approved PPG Weight Range (kg)	60-100	70-115	80-130	90-145	100-160	115-180
Certification EN/LTF*	B	B	B	B	B	B
DGAC Approval	Yes	Yes	Yes	Yes	Yes	Yes

* As delivered, the wing does not conform to the EN 926.2 standard due to the inclusion of the trimmer risers. Certified with the accelerator, but with the trimmers set to the slow position. Releasing the trimmers invalidates EN/LTF flight certification.


TECHNICAL DRAWINGS

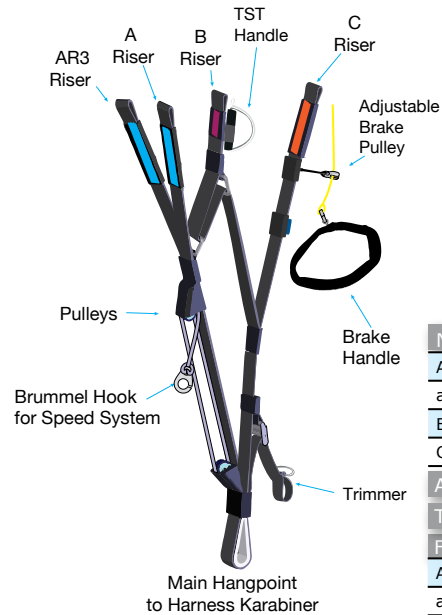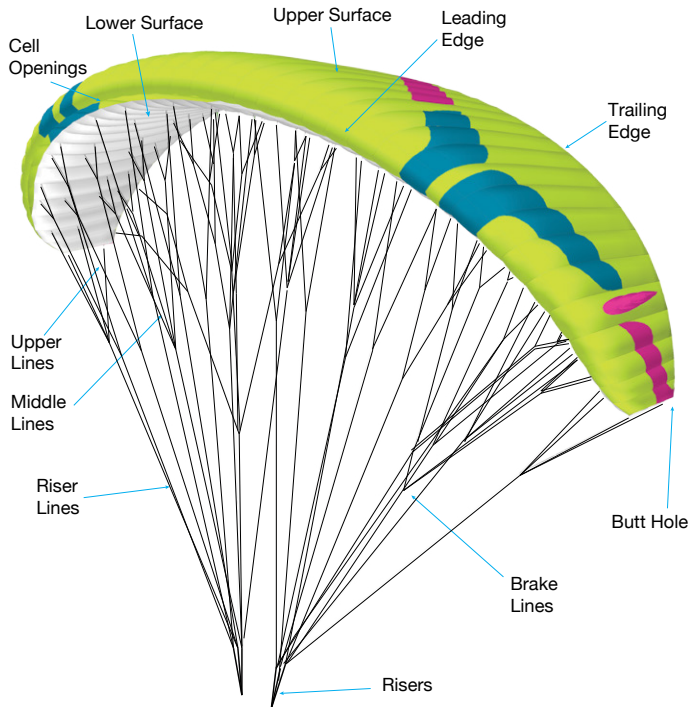

Non Accelerated	
A	500
a	500
B	500
C	500
Accelerator range - 95mm	
Trimmer range - 60mm	
Fully Accelerated	
A	405
a	405
B	435
C	560

LINE DIAGRAM

Individual and linked line lengths can be found online.

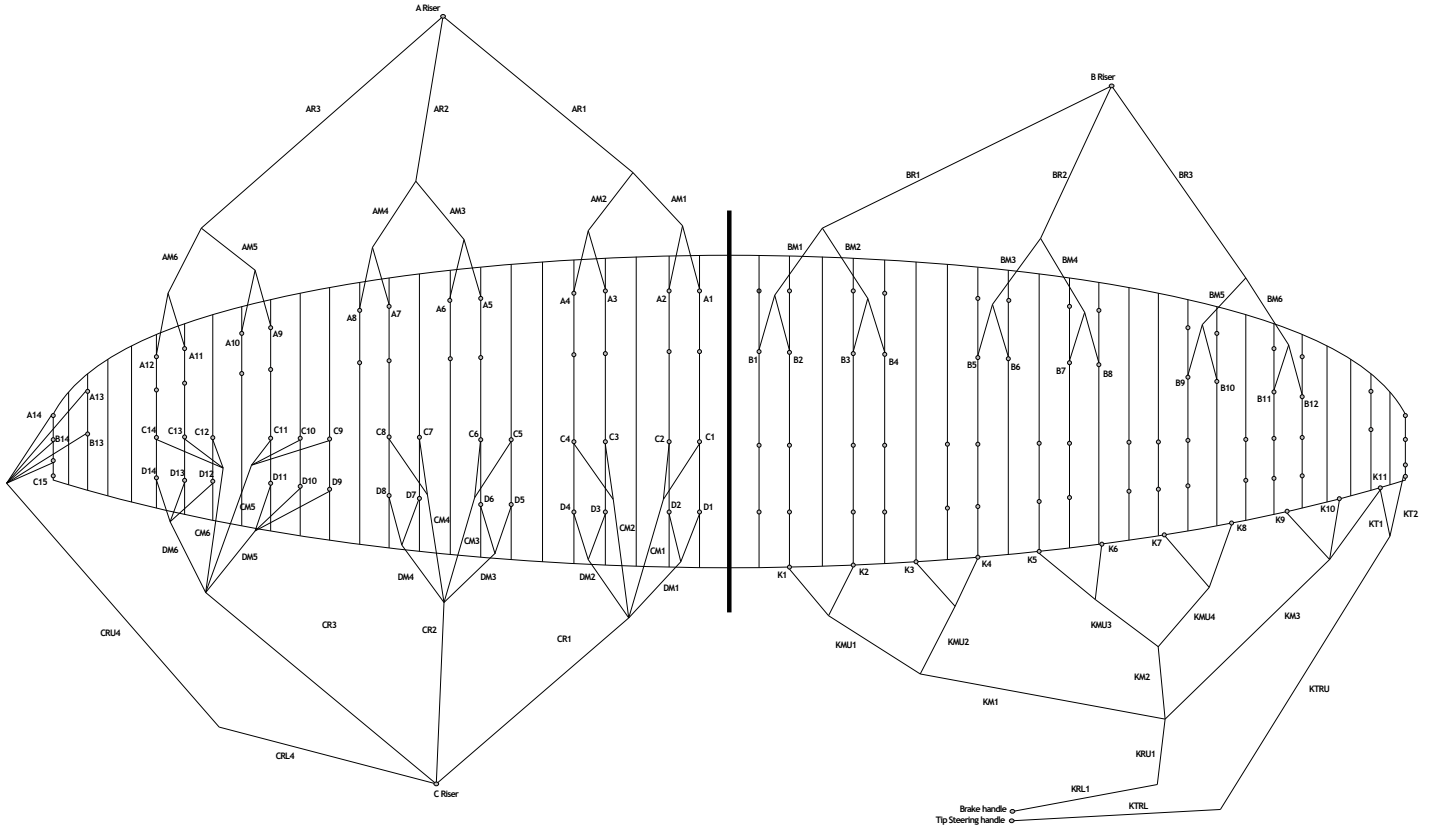

MATERIALS

All Ozone gliders are made from the highest quality materials available.

Cloth

Upper Surface

Dominico DOKDO 30D MF

Lower Surface

Dominico DOKDO N20D MF

Internal Ribs

Porcher 9017 E29 (hard)

Leading Edge Reinforcement

2.5/1.8mm Plastic pipe

Main Line Set

Riser Lines

Edelrid 6843

Middle Lines

Edelrid 8001

Upper Lines

Edelrid 8001

Brake Lines

Main brake Lines

Liros - 10-200-040/DSL

Middle brake lines

Edelrid 8001

Upper brake lines

Edelrid 8001

Risers and hardware

Maillons

Maillon Rapide - Pegeut

Riser webbing

20mm zero stretch polyester webbing

Pulleys

Ronstan ball bearing

INSPIRED BY NATURE, *DRIVEN* BY THE ELEMENTS

FLYOZONE.COM

OZONE

Ozone Power Ltd
16 Barnes Green
Livingston
Scotland
UNITED KINGDOM